

MAIN FLOOR ELECTRICAL PLAN


SCALE 1/4" = 1'

THERMOSTATS AS REQUIRED
SMOKE DETECTORS PER CODE


ELECTRICAL KEY	
	FLUORESCENT FIXTURE - CEILING MOUNT
	CLOSET OR CABINET FLUORESCENT ON WALL
	RECESSED CEILING FIXTURE
	WALL FIXTURE - HEIGHT DIM. TO G BOX
	JUNCTION BOX ONLY
	LOW VOLTAGE FIXTURE
	SURFACE MOUNTED CEILING FIXTURE
	PENDANT
	PORCELAIN BASE SOCKET
	FULL CHAIN SWITCH ON FIXTURE
	DECK SCONCE
	RAIL LIGHT (TRACK)
	EXTERIOR SPOT LIGHT
	UNDER CABINET LIGHT/TOGGLE ON UNIT
	DUPLEX OUTLET - 1 FT ABOVE FLOOR UNLESS NOTED OTHERWISE. 4 = FOURPLEX OUTLET
	DUPLEX OUTLET - TOP HALF SWITCHED
	240 VOLT OUTLET
	DUPLEX OUTLET - WATER RESISTANT
	GROUND FAULT INTERRUPTER - DUPLEX OUTLET
	DUPLEX OUTLET @ COUNTER HEIGHT. 42"
	FLOOR OUTLET W/ BRASS COVER PLATE

CF = COMPACT FLORESCENT UNITS

ELECTRICAL KEY	
	SWITCH
	3-WAY SWITCH
	4-WAY SWITCH
	DIMMER SWITCH
	DOOR BELL BUTTON
	DOOR CHIME
	TELEPHONE OUTLET:
	SECOND PHONE LINE
	TELEVISION CABLE OUTLET-CO-AXIAL
	COMPUTER
	FAN @ CEILING W/TIMER
	FAN @ WALL
	CEILING FANLIGHT

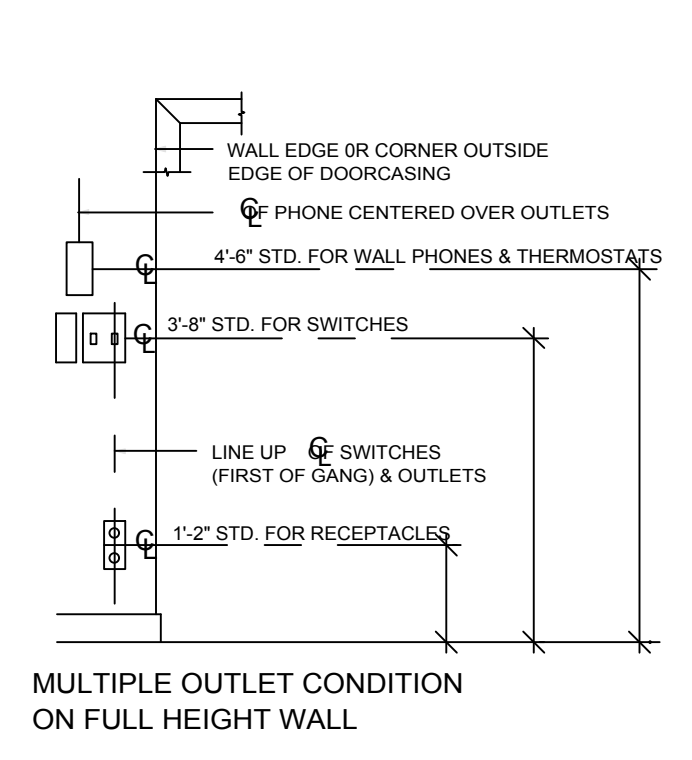

ELECTRICAL CONTROLS

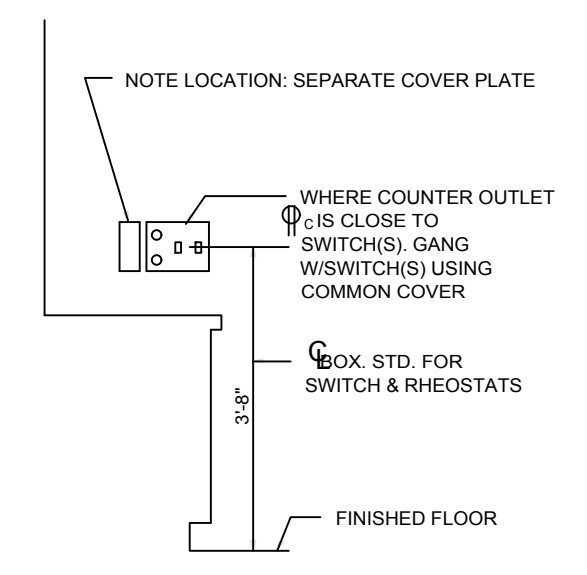

MULTIPLE ELECTRICAL OUTLETS NEAR COUNTER